



MATERIAL MAY BE SPREAD WHERE SUITABLE & AS DIRECTED BY SITE GEOTECHNICAL ENGINEER. GAPS TO BE PROVIDED AT REGULAR INTERVALS BETWEEN MOUNDS TO ALLOW DRAINAGE DOWNSLOPE TO ROAD DRAIN.

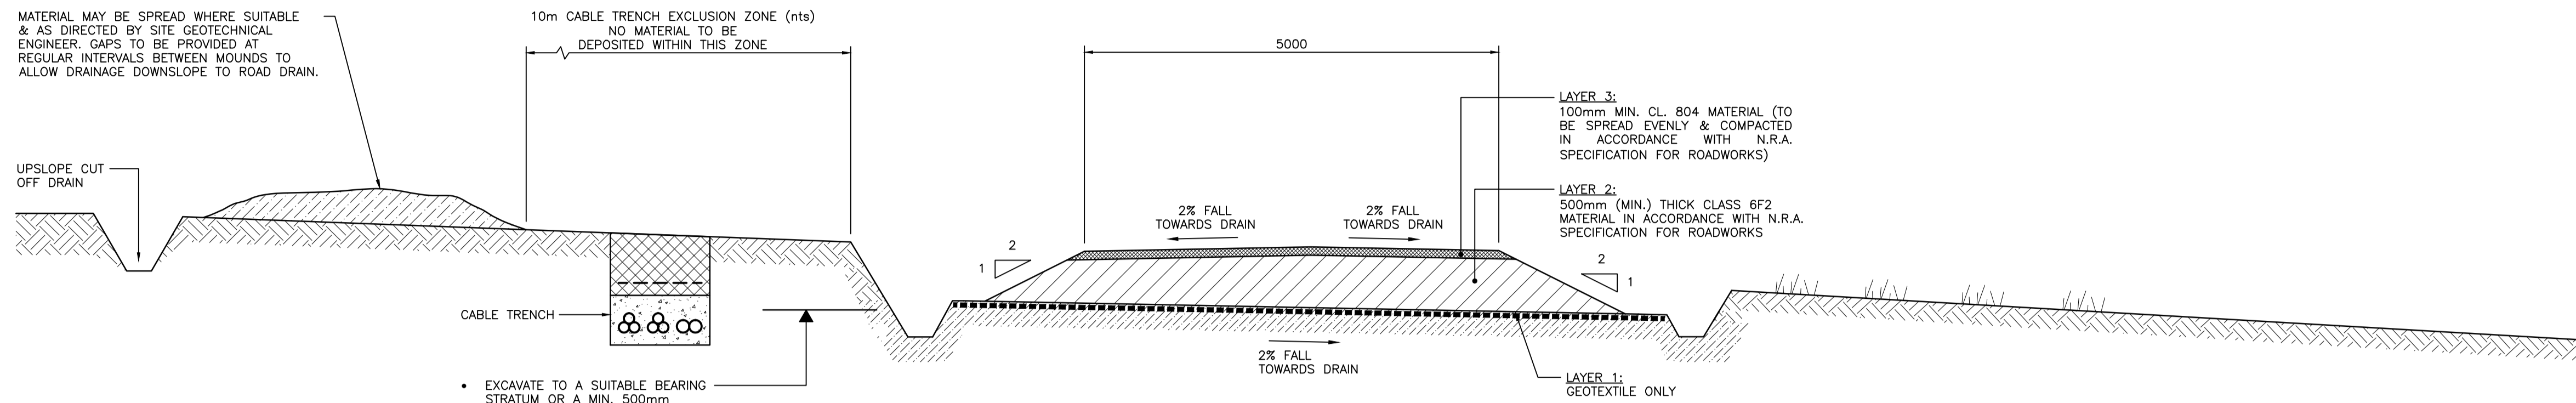

- EXCAVATE TO A SUITABLE BEARING STRATUM OR A MIN. 500mm BELOW EXISTING GROUND LEVEL UNLESS OTHERWISE AGREED WITH THE ENGINEER.
- ALL PEAT TO BE REMOVED.

**TYPICAL SECTION OF TRACK THROUGH AREA OF PEAT (TYPE A)**

SCALE 1:50

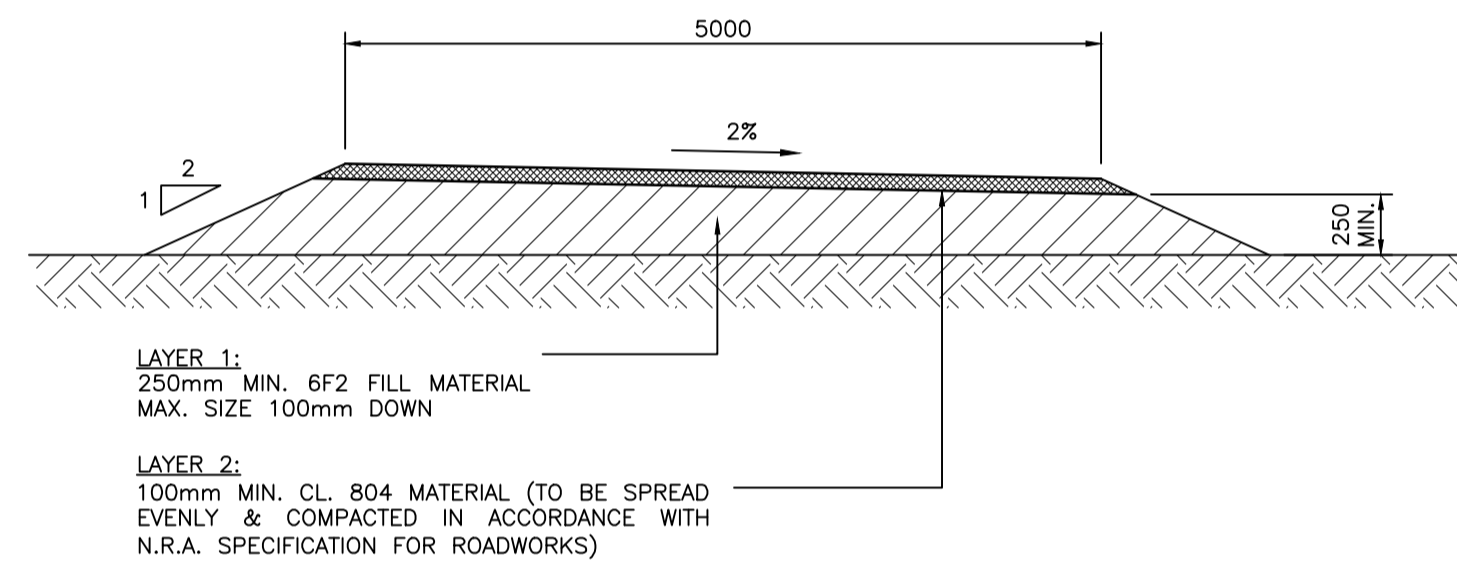

**TYPICAL SECTION OF TRACK THROUGH AREA OF ROCK (TYPE B)**

SCALE 1:50



**SNOW POLES:**

- SNOW POLES TO BE LOCATED AT 20m CTRS. & AT EDGES OF STEEP SLOPES, APPROX. 350 No. REQUIRED.
- SNOW POLES SHOULD TAKE INTO ACCOUNT TRADITIONAL LOCAL WEATHER CONDITIONS AND AGREEMENT WITH LANDOWNERS.
- TO BE A MINIMUM HEIGHT OF 1.5m ABOVE THE FINISHED GROUND LEVEL.
- TO BE OF SOLID CONSTRUCTION USING PLASTIC, GRP OR CONCRETE.
- SHALL BE SET IN LEAN MIX / CONCRETE TO ENSURE RIGIDITY.
- SHALL HAVE REFLECTIVE / HIGH VISIBILITY MARKINGS ON THE ENTIRE POLE. THE PREFERRED COLOUR IS GREEN WITH WHITE STRIPS, ALL REFLECTIVE, ANY MARKINGS SHALL FORM PART OF THE STRUCTURE & NOT FALL OFF.
- SHALL BE DESIGNED FOR THE 20 YEAR LIFE OF THE PROJECT.

**TYPICAL SNOW POLES**

N.T.S.

**NOTES:**

- ALL DRAWINGS TO BE READ IN CONJUNCTION WITH THE SPECIFICATION AND ALL ENGINEER'S DRAWINGS. ANY DISCREPANCIES ARE TO BE NOTED IN WRITING TO THIS OFFICE IMMEDIATELY PRIOR TO COMMENCING THE WORK.
- THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF ANY DISCREPANCIES BETWEEN THE STRUCTURAL PLANS AND DETAILS PRIOR TO COMMENCING THE WORK.
- ALL DIMENSIONS ARE IN m. (U.N.O.) NO DIMENSIONS SHALL BE SCALED FROM THE STRUCTURAL DRAWINGS. ALL DIMENSIONS SHALL BE CHECKED ON SITE.
- ANY TEMPORARY WORKS SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- ALL CLASS 6F2 MATERIAL & CLASS 804 MATERIAL TO BE IN ACCORDANCE WITH THE N.R.A. SPECIFICATION FOR ROADWORKS AND THE CIVIL SPECIFICATION.
- SUITABILITY OF FORMATION LEVEL TO BE ASSESSED AND AGREED ON SITE.
- WHERE THERE IS A LEVEL DIFFERENCE OF GREATER THAN 1m AT THE SIDE OF THE ACCESS TRACK A SUITABLE BERM SHALL BE CONSTRUCTED.

**OPTIONS FOR DISPOSAL OF SURPLUS EXCAVATED MATERIAL:**

UNLESS OTHERWISE STATED SURPLUS EXCAVATED MATERIAL ARISING FROM THE WORKS MAY BE DISPOSED OF ON SITE BY A MIXTURE OF ONE OR ALL OF THE FOLLOWING:

- SPREADING LOCALLY OR SIDE CASTING ADJACENT ACCESS TRACKS EXCAVATIONS IN DESIGNATED LOCATIONS WITHIN THE SITE BOUNDARY ON THE UPSLOPE SIDE AND OUTSIDE THE CABLE TRENCH EXCLUSION ZONE,
- IN FORMING SAFETY BERMS IN SPECIFIED LOCATIONS WITH SELECTED EXCAVATED MATERIAL OTHER THAN PEAT, WITH
- THE BALANCE SURPLUS EXCAVATED MATERIAL DISPOSED OF WITHIN ANY BORROW PITS / REPOSITORY AREAS IF UTILISED BY THE CONTRACTOR IN CONSTRUCTING THE WORKS.

THE CONTRACTOR SHOULD NOTE THAT THE DISPOSAL OF ANY SURPLUS MATERIAL IN THE BORROW PITS IS TO BE IN A MANAGED PROCEDURE AGREED IN ADVANCE WITH THE ENGINEER AND TO TAKE ACCOUNT OF THE FACT THAT THE CONTRACTOR MAY BE PERMITTED TO USE FILL MATERIAL OBTAINED FROM THE BORROW PITS IN THE PERMANENT WORKS SUBJECT TO IT MEETING THE SPECIFICATION REQUIREMENTS SET OUT IN THE TENDER ENQUIRY DOCUMENTS.

0	19.08.15	ISSUED FOR PLANNING	SB	DS	SS	FQ
REV.	DATE	REVISION DESCRIPTION	DRN	PRO	VER	APP
PURPOSE OF ISSUE - PRELIMINARY UNLESS INDICATED						
TENDER	<input type="checkbox"/>	CLIENT APPROVAL	<input type="checkbox"/>	CONSTRUCTION	<input type="checkbox"/>	AS-BUILT
						REVISED
Client	ESB WIND DEVELOPMENT LTD.					
Project	GROUSEMOUNT WIND FARM					
Contract	PLANNING APPLICATION					
Drawing Title	ACCESS TRACK CONSTRUCTION DETAILS					
Production Unit	WIND DEVELOPMENT					
<p>ESB Wind Development Ltd., Stephen Court, 18-21 St. Stephen's Green, Dublin 2, Ireland Tel: +353 (01) 703800 Web: www.esb.ie Registered Office: as above Registered in Ireland No. 471139</p>						
DRAWN	PRODUCED	VERIFIED	APPROVED	APPRO DATE		
S. Bolton	D. Shiels	S. Shanley	F. Quigley	19.08.2015		
CLIENT REF	No. of Sheets	SIZE	REV	SCALE		
	1	A1	0	1:50		
DRAWING NUMBER						
QR320171-MWC-P-3001						